

## FACSIMILE TRANSMITTAL COVER SHEET

Date: **July 21, 2004**

To: **Lun-See LAO - Application No. 09/522,178**

Facsimile No.: **703746-7459**

This transmission is intended for the sole use of the individual and entity to whom it is addressed, and may contain information that is privileged, confidential and exempt from disclosure under applicable law. You are hereby notified that any dissemination, distribution or duplication of this transmission by someone other than the intended addressee or its designated agent is strictly prohibited. If your receipt of this transmission is in error, please notify this firm immediately by collect call to (703) 205-8000, and send the original transmission to us by return mail at the address below.

From: **JAMES M. SLATTERY**

Mail Address: **BIRCH, STEWART, KOLASCH & BIRCH, LLP  
P.O. Box 747  
FALLS CHURCH, VIRGINIA 22040-0747**

Phone: **(703) 205-8000 -- Switchboard** Time:  
**(703) 205-8050 -- Facsimile No. 1**  
No

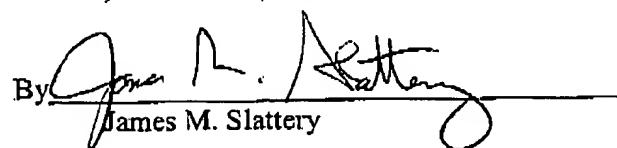
**2 Pages to follow.** **SPECIAL INSTRUCTIONS:**

Dear Mr. Lao:

Attached are copies of claims 1 and 6 that will be discussed during our interview tomorrow.

Very truly yours,

**BIRCH, STEWART, KOLASCH & BIRCH, LLP**

By   
James M. Slattery

JMS/mmi  
cnc.



09/522,178  
Page 1 of 2

#### PROPOSED AMENDMENTS TO THE CLAIMS:

1. (Currently Amended) An active noise control circuit comprising:
  - feed-forward control means for being supplied with a reference signal highly correlated to noise from a noise source and generating a noise cancellation signal which is out of phase to noise in the passenger compartment of a vehicle;
  - canceling sound generating means disposed in the passenger compartment for generating a noise canceling sound in response to the noise cancellation signal from said feed-forward control means;
  - a microphone disposed centrally in the width direction of the vehicle and at an antinode of an acoustic normal mode of the passenger compartment, for generating an output signal as the reference signal said microphone being disposed centrally in the width direction of the vehicle so as to not be affected by predetermined external noises; and
  - a noise cancellation-confirming microphone for confirming cancellation of the noise in the passenger compartment;
  - wherein said feed-forward control means comprises means for lowering the levels of output signals from said noise cancellation-confirming microphone with the noise cancellation signal; and
  - wherein said noise cancellation-confirming microphone is positioned in a vicinity of ears of occupants seated in the passenger compartment.

09/522,178  
Page 2 of 2

6. (Currently Amended) An active noise control system comprising:  
a microphone positioned centrally in the width direction of a vehicle and at an antinode of a primary or secondary acoustic normal mode of the passenger compartment of the vehicle, said microphone being disposed centrally in the width direction of the vehicle so as to not be affected by predetermined external noises;  
canceling sound generating means disposed in the passenger compartment for generating a noise canceling sound;  
a feedback control circuit for being supplied with an output signal from said microphone and generating an output signal to energize said canceling sound generating means; and  
a storage box;  
wherein said microphone and said feedback control circuit are housed together in said storage box, said feedback control circuit having an adjusting circuit for adjusting the amplitude and phase between a canceling sound generating means and the microphone, based on a transfer characteristic from said microphone, to generate a noise cancellation signal which is of the same sound pressure as, but out of phase to, noise at the microphone.